



KSR-12008-DVI

Single rail 20.1" LCD console with 8 ports DVI USB KVM switch


The KSR-12008-DVI is a TMDS-compliant 8-port DVI USB KVM console with Audio switching function. It allows you to control 8 USB-enabled multimedia computers with DVI video interfaces, using only one keyboard, mouse, monitor and a set of speakers. This DVI USB KVM console supports 1600 x 1200 for your maximum convenience in adapting to your display requirements.




Features

- Single rail easy to install and use
- Support 17 various keyboard languages
- 8-port DVI USB KVM switch with audio switching and 2 x USB 2.0 hub ports
- TMDS specifications compliant
- VESA DDC2B emulation
- TMDS signal passthrough
- HDCP specifications compliant
- USB Keyboard and mouse support
- USB 2.0 Specification compliant
- DVI Single Link technology supports digital video signal transmission
- Independent / simultaneous USB hub port, audio channels and PC port selection
- Support for Windows 98 / SE / ME / 2000 / XP / Vista and Linux and Mac OS
- Built-in 2-port USB 2.0 device hub for sharing high-speed USB devices
- Multi-platform support for PCs and Macintosh G3/G4 MACs, iMACs
- Channel selection by push button and keyboard hotkey
- Resolution support up to 1600 x 1200

Application

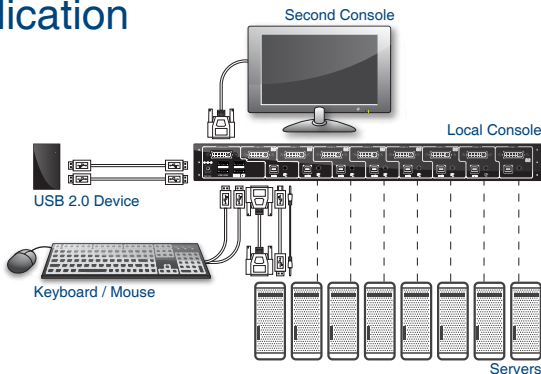

Dimensions

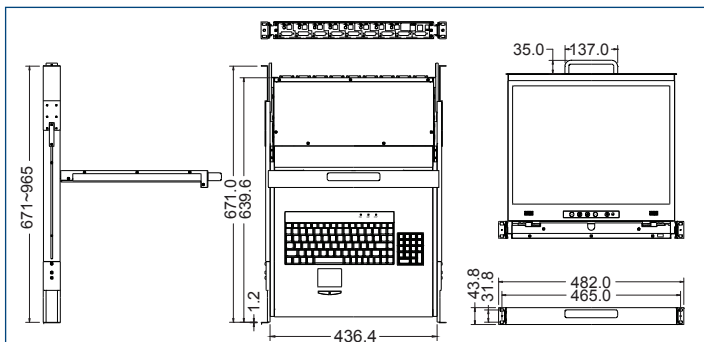

Specifications

Model Name	KSR-12008-DVI	
Dimension	527.2 x 436.4 x 43.8 mm / 20.8 x 17.2 x 1.7 inches	
Display Size	20.1 inches	
Panel Type	Active Matrix TFT LCD	
Resolution Capabilities	Maximum Resolution up to 1600 x 1200 (UXGA)	
Pixel Pitch	Supports 0.255 mm x 0.255 mm	
Active Display Area	Horizontal: 408.0 mm Vertical: 306.0 mm	
Viewing Angle (CR>10)	Right-Left view 178° (Typ) Up-Down View 178° (Typ)	
Contrast Ratio	700 : 1	
Brightness	300 cd/m ²	
Back Light	Six Lamps for Back Light	
Supported Colors	16.7M Colors (RGB 8-bit data)	
Response Time	Rising Time 7 ms, Falling Time 9 ms	
Operating System	Dos, Windows (3.1, 9x, 2000, NT4, ME, XP, 2003 Server, Vista, 7) Linux, Novell 3.12-6, HP UX, SUN	
Signal Cables	DVI-D, USB A-B, Audio cable	
Keyboard Mouse	106 key PS/2 keyboard with touch pad	
Sync	45 ~ 80 KHz	
Power Source	100 ~ 240 VAC input	
Power Consumption	40 W	
Temperature	Operate 0 ~ 50°C / 32 ~ 122°F Storage -20 ~ 60°C / -4 ~ 140°F	
Humidity	10% ~ 90% RH	
Chassis Construction	Heavy duty steel materials	
Keyboard Language	US, UK, German, French, Spanish, Italian, Portuguese, Dutch, Swiss, Belgium, Swedish, Norwegian, Danish, Japanese, Mandarin, Russian, Hebrew	
DVI KVM Switch		
System Connections	8	
Connectors	PC Port	8 x USB Type B
	Connectors	8 x DVI-I Single Link (digital only) 8 x 3.5mm audio jack
Console	Connectors	1 x DVI-I Single Link (digital only)
	Connectors	2 x USB 1.1 Type A for Keyboard/Mouse
USB Hub Ports	2 x USB 2.0 Type A device hub port	
Power Connector	1 x DC jack	
PC Selection	Hotkey	
Scan Delay Time	5 ~ 100 sec programmable	

Rear View



Options

Color (Black / Beige / OEM color)

Rear bracket extension up to 1000mm