

WP-920

Wall mount 20.1" TFT LCD monitor

WP-920 is designed to provide the industrial user with superior picture quality and state-of-the-art features housed in a rugged industrial enclosure, which will assure reliable operation in most harsh environments.



Features

- Support Sun native resolution
- Bright Active Matrix TFT display
- OSD function (On Screen Display) for LCD display
- Panel protected by tempered glass
- Touchscreen function (optional)

Options

Color (Black / Beige / OEM color)


Touch screen (RS232 or USB)

DVI interface

Specification

Model Name	WP-920
Dimension	482.6 x 398.6 x 64 mm / 19.0 x 15.7 x 2.5 inches
Package Dimension	561 x 526 x 250 mm / 22.1 x 20.7 x 9.8 inches
Net Weight	14.0 Kg / 30.9 lbs
Gross Weight	18.2 Kg / 40.1 lbs
Display Size	20.1 inches
Panel Type	Active Matrix TFT LCD
Resolution Capabilities	Maximum up to 1600 x 1200 (UXGA)
Pixel Pitch	0.255 mm x 0.255 mm
Contrast Ratio	1000 : 1
Viewing Angle (CR>10)	Right-Left view 178° (Typ) Up-Down View 178° (Typ)
Brightness	White 300 cd/m ²
Back Light	Six Lamps for Back Light
Supported Colors	16.7M Colors (RGB 8-bit data)
Response Time	Rising Time 7 ms, Decay Time 9 ms
Signal Cables	VGA cable / DVI cable
Sync	45 ~ 80 KHz
Power Source	100 ~ 240 VAC input
Power Consumption	45 W
Temperature	Operate 0 ~ 50 °C / 32 ~ 122 °F Storage -20 ~ 60 °C / -4 ~ 140 °F
Humidity	10% ~ 90% RH
Chassis Construction	Heavy duty steel materials
Touch Panel (optional)	5 wires resistive USB interface / RS232 interface

Application

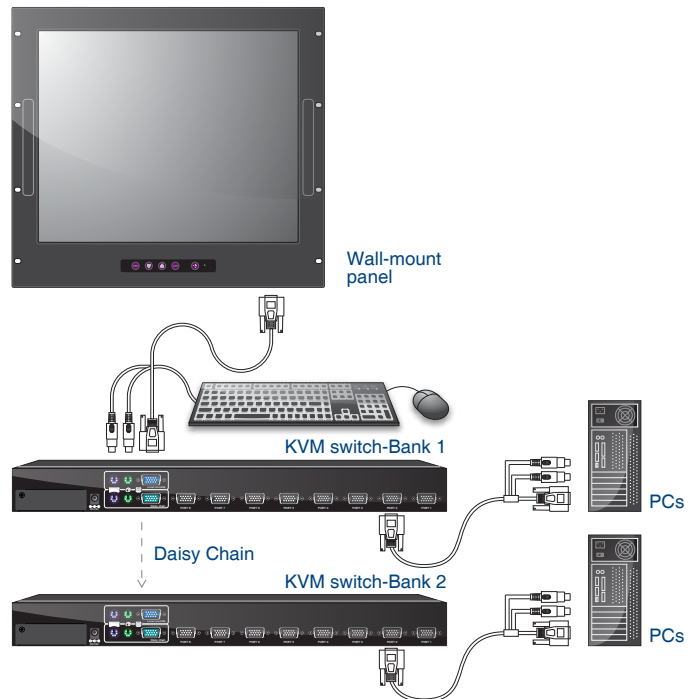

Dimension

