



PD-119

1U rack mount 19" TFT LCD panel drawer

PD-119 is designed to provide the industrial user with superior picture quality in just 1U rack space. It is housed in a rugged industrial enclosure, which will assure reliable operation in most harsh environments.



Features

- Support Sun native resolution
- Bright Active Matrix TFT display
- OSD function (On Screen Display) for LCD display
- Panel protected by tempered glass
- Touchscreen function (optional)

Ordering Option

Color (Black / Beige / OEM color)

Touch screen


DVI interface

Touch screen + DVI interface

Specification

| | |
|-------------------------|----------------------------------------------------------------------|
| Model Name | PD-119 |
| Dimension | 511.3 x 443.5 x 44 mm / 20.1 x 17.5 x 1.7 inches |
| Package Dimension | 664 x 564 x 185 mm / 26.1 x 22.2 x 7.3 inches |
| Net Weight | 12.0 Kg / 26.5 lbs |
| Gross Weight | 18.0 Kg / 39.7 lbs |
| Display Size | 19 inches |
| Panel Type | Active Matrix TFT LCD |
| Resolution Capabilities | 1280 x 1024 (SXGA) |
| Pixel Pitch | 0.098 mm x 0.294 mm |
| Contrast Ratio | 500 : 1 |
| Viewing Angle (CR>10) | Right-Left view 140° (Typ) Up-Down View 140° (Typ) |
| Brightness | White 250 cd/m ² |
| Back Light | Four Lamps for Back Light |
| Supported Colors | 16.2M Colors |
| Response Time | Rising Time 2 ms, Decay Time 10 ms |
| Signal Cables | VGA cable / DVI cable |
| Sync | 45 ~ 80 KHz |
| Power Source | 100 ~ 240 VAC input |
| Power Consumption | 21.05 W |
| Temperature | Operate 0 ~ 50 °C / 32 ~ 122 °F Storage -20 ~ 60 °C / -4 ~ 140 °F |
| Humidity | 10% ~ 90% RH |
| Chassis Construction | Heavy duty steel materials |
| Touch Panel (optional) | 5 wires resistive USB interface / RS232 interface |

Application

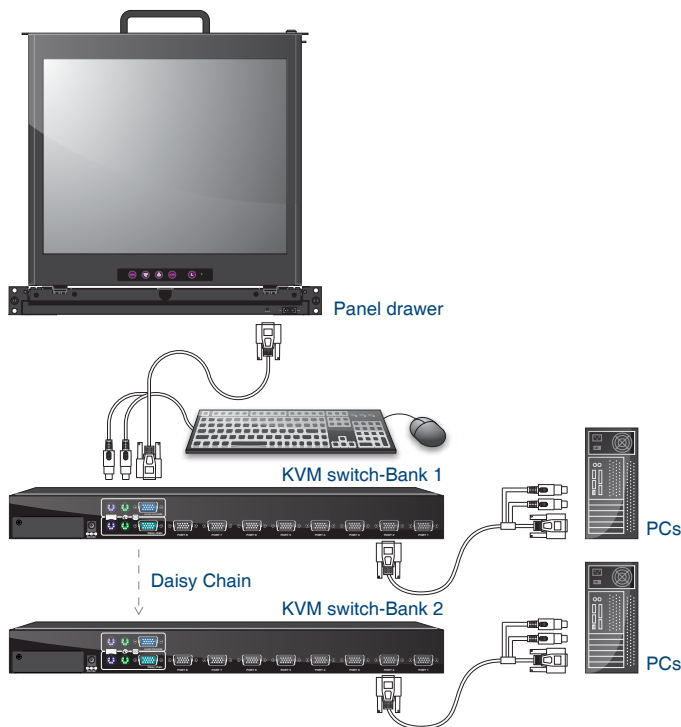

Dimension

