

NEW



IBP-202

Optical Fiber Bypass Switch



The IBP-202 Optical Bypass Switch is an industrial grade external bypass switch for optical-node failure in fiber optical network infrastructures. The IBP-202 Optical Bypass Switch prevents and saves communication from network failures during power loss. When power failure occurs, the Bypass switch will swiftly set to bypass mode and isolate the main-network from the local networking device (See Figure 1). Bypass switches are commonly used in some major optical networks, such as in railway communication systems, factory automation, and power substation, where fiber link failures are not tolerated.

Features

- Supports 100M/1G/2.5G/10G Ethernet or Telecom applications
- Supports SC/ST/LC single mode optical connectors
- Optical bypass switching time <10ms with Low insertions loss
- Provides rotary switch to set delay boot time (0~180 seconds)
- Redundant dual DC input power 12/24/48VDC (9.6 ~ 60VDC)
- IP30 rugged metal housing and fanless
- Wide operating temperature -20 ~ 70°C
- Heavy industrial grade EMS, EMI, EN50121-4, EN61000-6-2, EN61000-6-4, CE, FCC certified

Specifications

Fiber Connector	SC, ST, LC	Storage temperature	-40 ~ 85°C
Operating wavelength	1260 ~ 1650nm	Operating Humidity	5% ~ 95% (Non-condensing)
Optic Fiber cable	Single mode 8/125um, 9/125um	MTBF	273,054 Hours (MIL-HDBK-217)
Insertion loss	<1.5dB	Warranty	5 Years
Optical Switching time	< 10ms	Certification	
LED indicator	Power 1, Power 2, Operation mode (Normal /Bypass)	EMC	EN55024, EN55032
Boot up delay adjuster	Provides a rotary switch to configure boot up delay time (0~180 seconds)	EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Removable Terminal Block	Provide for redundant power	Immunity for Heavy Industrial Environment	EN61000-6-2
Power supply	12/24/48VDC (9.6~60VDC), Redundant power with polarity reverse protect function and removable terminal block	Emission for Heavy Industrial Environment	EN61000-6-4
Reverse Polarity Protection	Supported for Power Input	Railway Traffic	EN50121-4
Overload Current Protection	Supported	EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (EFT) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF) Field strength 300A/m Criteria A
Power consumption	0.4W (12VDC), 0.5W (24VDC), 0.8W (48VDC)	Shock	IEC 60068-2-27
Housing	Rugged metal, IP30 protection and fanless	Freefall	IEC 60068-2-32
Dimensions	106 x 62.5 x 135mm (D x W x H)	Vibration	IEC 60068-2-6
Weight	530g (IBP-202-SLC) 545g (IBP-202-SSC, IBP-202-SST)		
Installation	DIN Rail mounting, or wall mounting (Optional)		
Operating Temperature	-20~70°C		

Application

The IBP-202 supports the function of optical path Normal mode and Bypass mode for fiber optical networks. It offers a simple mechanism to switch both of upload and down load fiber path when a power system failure occurs, and a path restores when power back. It offers a simple way to reduce the risk of optical network Node-Down which is caused by the power system.

Figure 1 :IBP-202 Data flow in Normal or Bypass mode

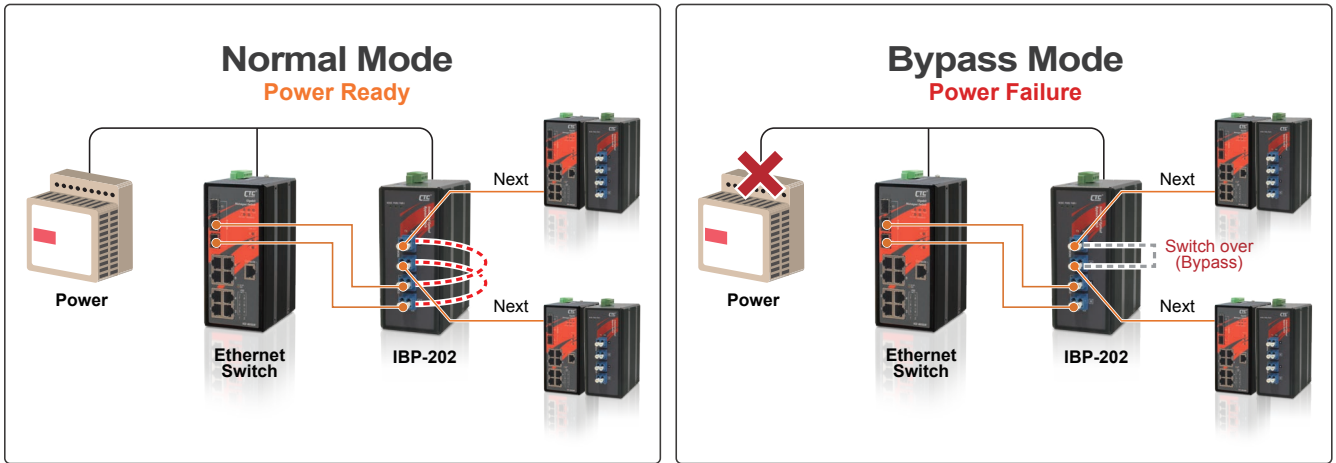


Figure 2 : Application example in line connection



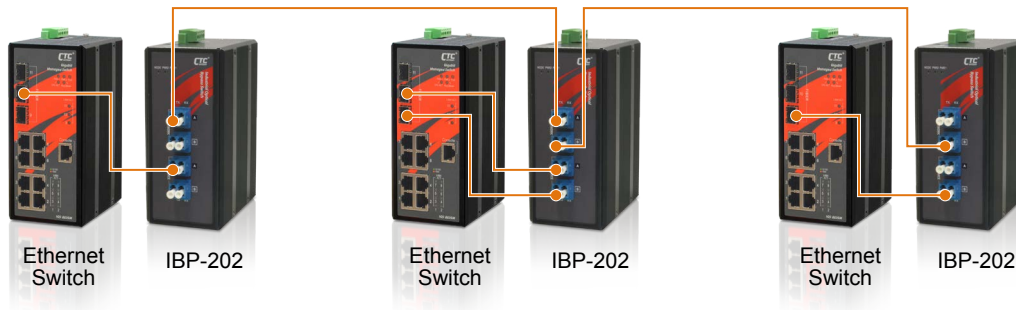


Figure 3 : Application example in ring connection

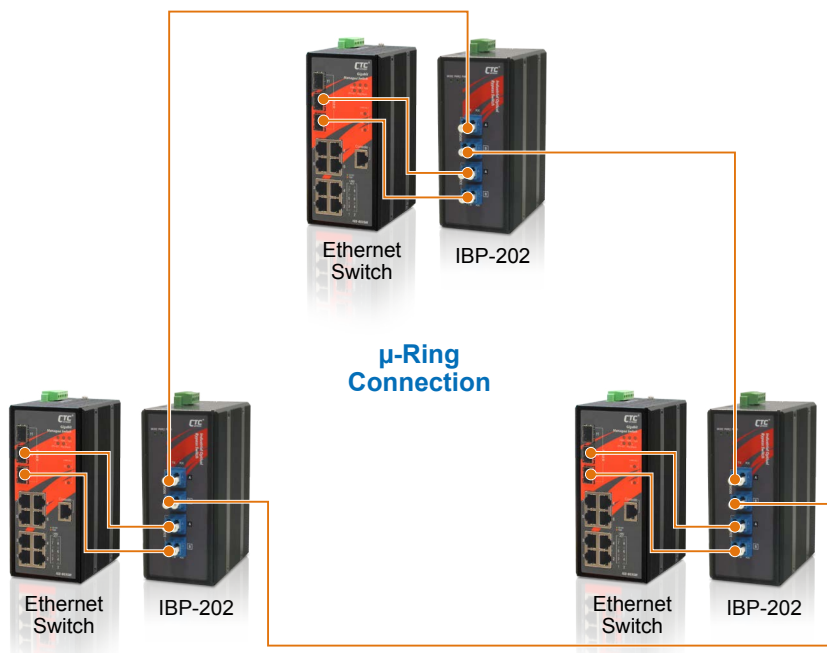


Dimensions


▶ IBP-202 SC Type

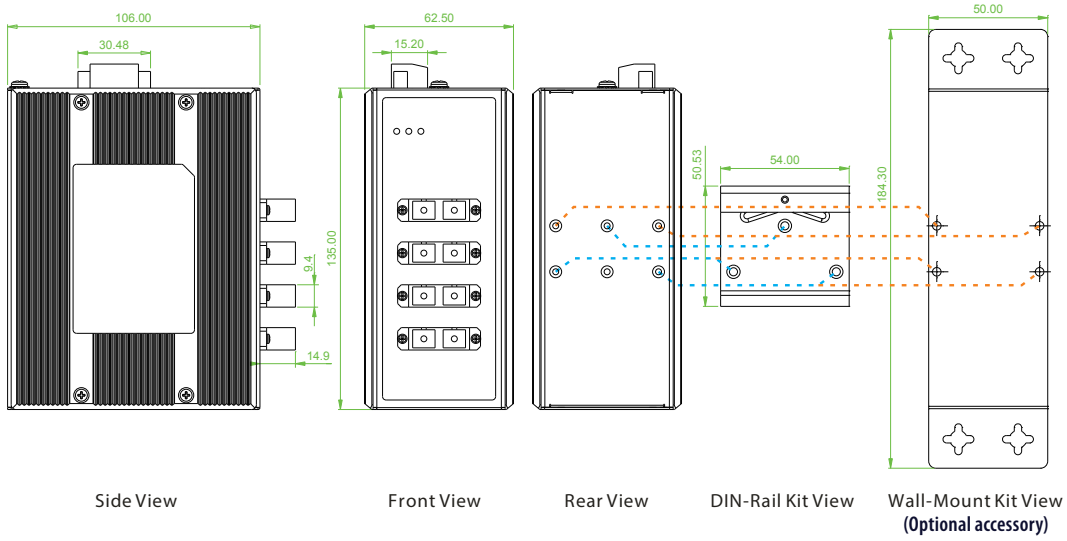

▶ IBP-202 LC Type

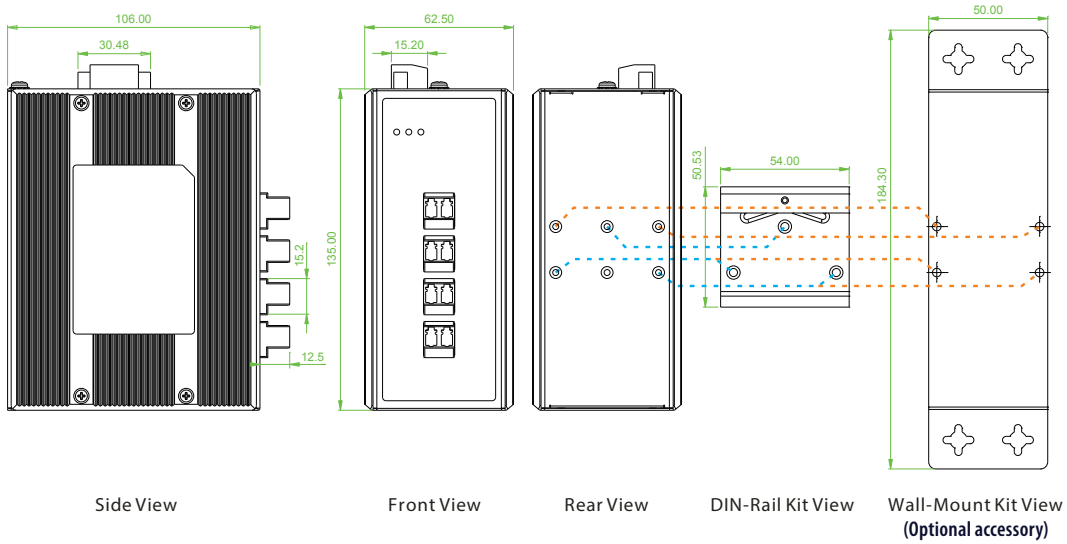

▶ IBP-202 ST Type

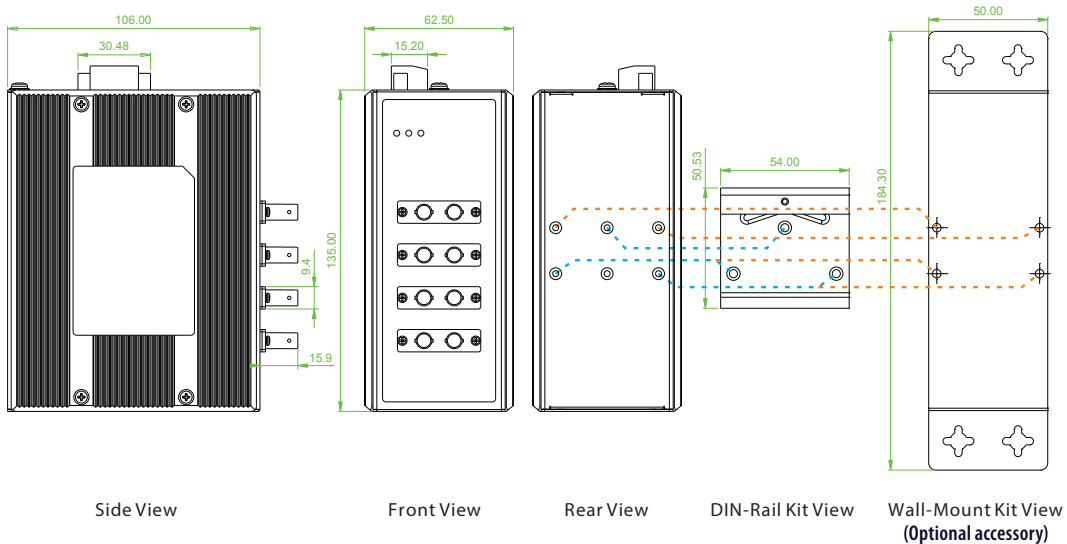

Ordering Information

Model Name	Fiber connector			Power Input	Certification				Operating Temperature
	Connector type	Connector Q'ty	Data rate	Redundant	EN61000-6-2 EN61000-6-4	EN50121-4	CE	FCC	
IBP-202-SSC	SM SC	4	100M/Giga/10G	12/24/48VDC	V	V	V	V	-20~70°C
IBP-202-SST	SM ST	4	100M/Giga/10G	12/24/48VDC	V	V	V	V	-20~70°C
IBP-202-SLC	SM LC	4	100M/Giga/10G	12/24/48VDC	V	V	V	V	-20~70°C

■ Package List

- IBP-202 device
- Quick installation guide
- Din Rail with screws
- Terminal block

Optional Accessories

■ Wall Mount Kit Accessories

IND-WMK02	Wall Mount kit for Industrial product, 184 x 50mm
-----------	---