



RoHS COMPLIANT

DESCRIPTION CONTROL

REV	DESC	DATE	APP
A	FIRST RELEASE	2018/08/27	

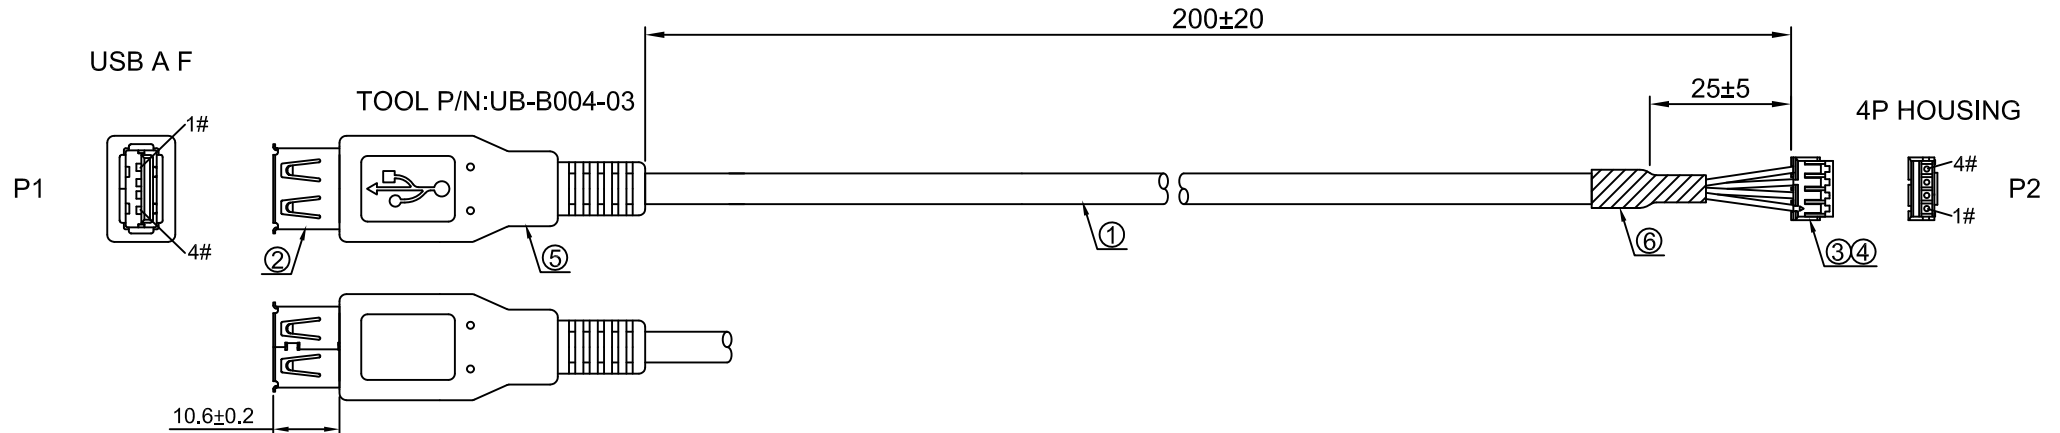

PIN ASSIGNMENT

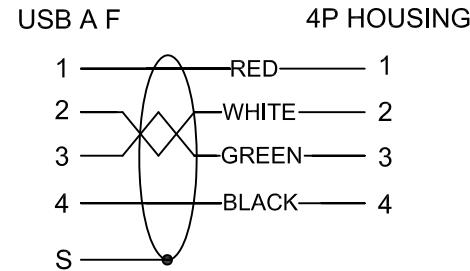

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
 - CONTACT RESISTANCE: 3ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
6	1		BLACK HEAT SHRINK TUBE.
5		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
4	4	B0291	TERMINAL: PITCH 1.5MM TIN PLATED.
3	1	B0289	HOUSING: 4P PITCH 1.5MM WHITE.
2	1	A0603	USB A TYPE FEMALE, SOLDER TYPE, WHITE INSULATOR.
1	1	E0329	28AWG*1PAIR+28AWG*2C+ADB, OD: 3.5mm BLACK PVC JACKET UL2725.

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.		
DRAWN	<i>Deng zhifei</i>	SCALE	FREE	TITLE			
CHECK, BY	<i>Cao jiawei</i>	REV	A	USB A F/4P HOUSING			
APP, BY	<i>Mr. Huang</i>	DATE	2018/08/27	TOLERANCES			
DWG NO.	SE-S-0360			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	SE-S-0360			SHEET	1/1	SIZE	A4