



RECOMMENDED P.C.B. BOARD LAYOUT  
GENERAL TOLERANCE ±0.05

pin number	pin name
G1	switch
pin 8	RSV
pin 7	DD
pin 6	VSS
pin 5	SCLK
pin 4	VDD
pin 3	DI
pin 2	CS
pin 1	RSV



NOTES:

- MATERIAL:
  - Housing: High Temperature Thermoplastic UL94V-0; Color Black.
  - Terminal: Copper Alloy.
  - Shell: Stainless Steel.
- SPECIALITY:
  - Rated current: 0.5A
  - Rated voltage: 30V
  - Contact Resistance: 50mΩ MAX
  - Insulation Resistance: 100MΩ MIN 100V DC
  - Dielectric withstanding voltage: 100V AC.
  - Solder ability: 235±5°C, 5±0.5s.
  - Durability: 5000 Cycles Min.
  - Operating condition: Temperature -40°C ~ +85°C; Humidity 80% R.H MAX
- PLEASE CONTACT JITS SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY

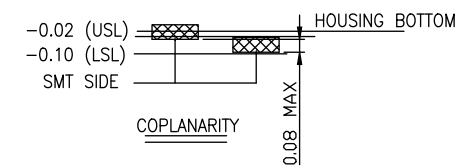

RECOMMEND PCB LAYOUT  
RECOMMEND TOLERANCE: +/-0.05MM  
FRAME OF CONNECTOR: - - - - -

Seconn International Enterprise Co., Ltd.

TOLERANCES		PROJECTION	TITLE			
X.	= ± ----	 UNIT mm	T-flash Card Connector Short Type H:1.50mm			
X.X	= ± 0.38					
X.XX	= ± 0.25					
X.XXX	= ± 0.10					
DRAWN	COCO	DATE	2014/01/15	PART NO.	TF-SD09-15A	
SCALE	NA	SIZE	A4	SHEET	1/1	REV A

REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE	SCALE	SIZE	SHEET	1/1	REV	A
1					4	A4	5	1/1		A