


**Cat.6A STP Field Terminable Plug, 90 Deg. (8\*45°)**  
 TA34P6AS-BAK



IEC 60512-99-001:2012  
 IEC 60512-9-3:2011

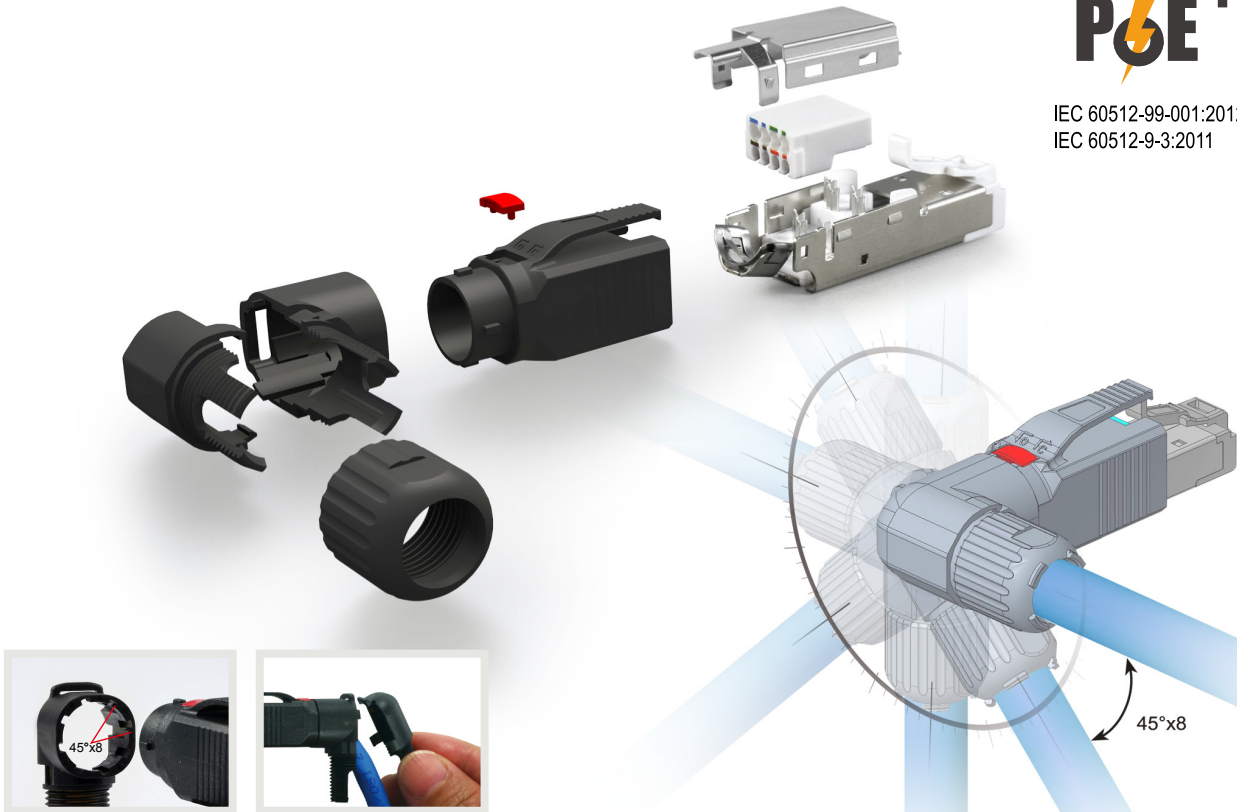

**Specification:**

Qualified Screened Cat.6A Connecting Hardware  
 TIA-568.2-D  
 IEC60603-7-51  
 ISO/IEC11801 2.2 Edition  
 CENELEC EN 50173-1

**Power over Ethernet:**

PoE+ type I & II  
 IEEE 802.3at  
 IEC 60512-99-001 (2012-08)  
 IEC 60512-9-3 (2011-06)

**Electrical:**

Insulation Resistance: 500 Mohms minimum  
 Contact Resistance: 20 mohms maximum

**Mechanical:**

Durability: 1000 mating cycles.  
 Cable to Plug Tensile Strength: 20 lbs (89N) min.  
 Temperature: -40°F to 150°F (-40°C to 68°C)

**Physicals:**

IDC-Contact: T=0.4mm phosphor bronze, Sn over nickel plating.  
 Accept Cable: #26~23AWG solid wire. Outer diameter 6.0~8.5

**Application:**

- MPTL
- Industrial
- Enterprise

