


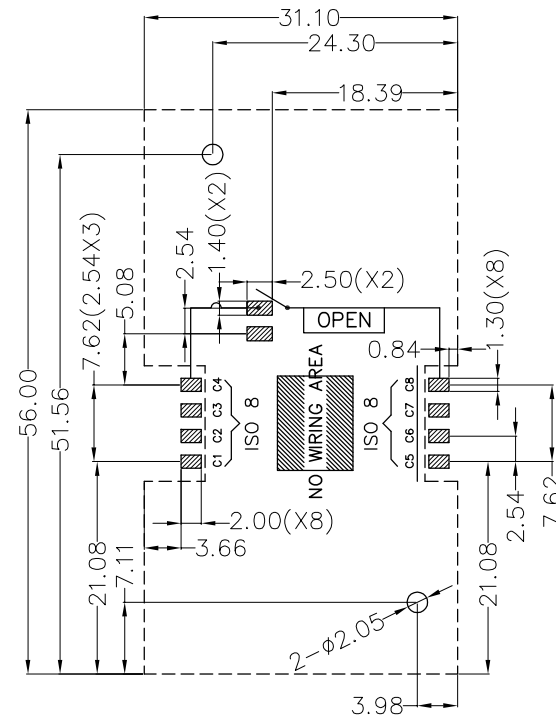


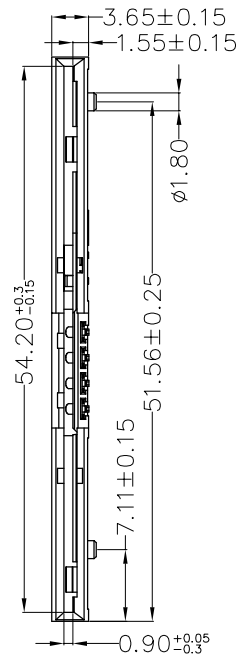

标记 SYM.	内 DESCRIPTION OF REVISIONS	容	绘图 DRAWN	审核 APPD	日期 DATE
△	正式发行		Xue		2015.03.21

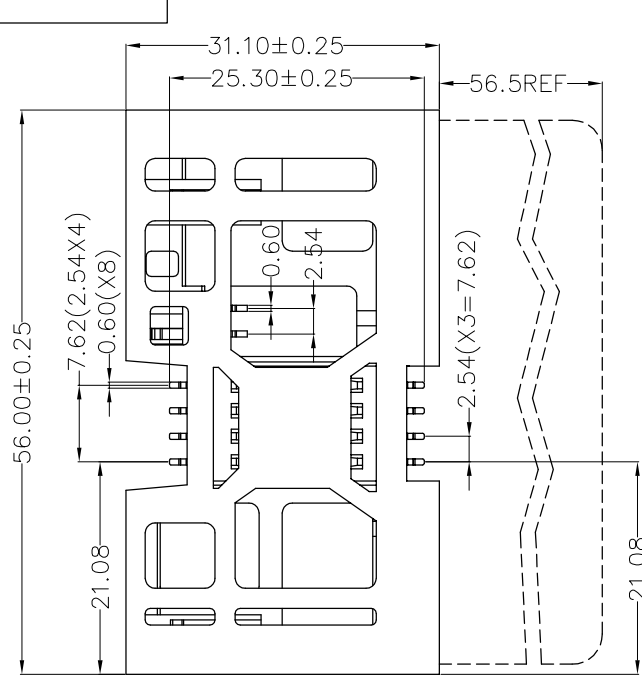

RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE(TOLERANCE ±0.15)

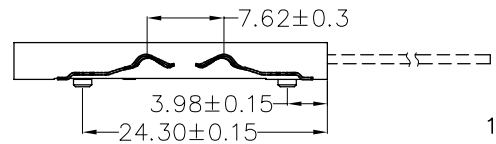

TECHNICAL CHARACTERISTICS

1.General Characteristics

Dimensions: 56.0LX31.1WX3.65H mm

Weight: Approx4.15±0.5g

Durability:100,000 cycles min.

2.Electrical Characteristics

Contact resistance: 50Ω typical,100Ω max

Insulation resistance:>1000MΩ/500V DC

3.Solderability

Vapor phase: 215°C,30sec.Max

IR reflow: : 260°C,10sec.Max


Manual soldering: 370°C,3sec.Max

4.Environmental Characteristics

Operating temperature: -40°C~+85°C

Operating humidity: 10%~+95%RH

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	OPEN
CARD INSERTED	CLOSED



SWITCH OPERATION DIAGRAM

出货时产品会加装1塞子, SMT后取出。

ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	BASE	1	Hi-temp Thermoplastic	Black UL94V-0
2	FITTINGS	1	Hi-temp Thermoplastic	Black UL94V-0
3	DATA CONTACT	8	Copper Alloy	Contact area:Gold plated
4	SWITCH CONTACT 2	1	Copper Alloy	Contact area:Gold plated
5	SWITCH CONTACT 1	1	Copper Alloy	Contact area:Gold plated

Seconn International Enterprise Co., Ltd.

TOLERANCES		PROJECTION	TITLE				
x. = ±0.30	x.° = ±2.0°		Smart Card Connector Friction Type				
x.x = ±0.25	x.° = ±1.0°						
x.xx = ±0.20	.xx° = ±1.0°						
x.xxx = ±0.05	.xxx° = ±1.0°	UNIT					
		mm					
DRAWN	XUE	DATE	2015/03/21	PART NO.	SC-SE6802-083511014-01A		
SCALE	1:0.7	SIZE	A4	SHEET	1/1	REV	A