


A/V Splitter --- AVS-104

Broadcast Audio and Video to Multiple Remote

Monitors Up To 300m/1000ft over a Single CAT5

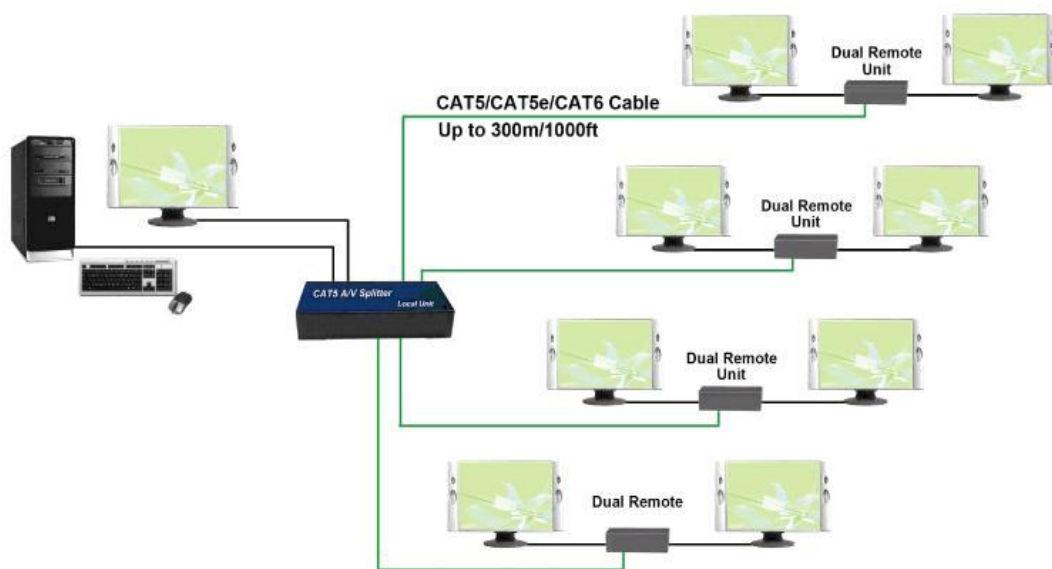

CAT5 A/V Splitter can simultaneously transmits the audio and video signals to up to 8 or 16 remote monitors, so the viewers not only see what is being broadcasted but also hear it.

The system consists of 4/8-outport Local Unit at the computer's/player's site and Dual Remote Unit for the remote monitors. Those two units are connected via a single CAT5 cable to reduce the cable clutter significantly and the pure hardware design makes the installation easy, simply plug and play without any software installation.

All the remote monitors can be located at different places at the distance of up to 300m/1000ft away from the computer/player to provide the flexibility on setting up the ideal digital signage you need.



Dual Remote Unit

Model No.: AVS-R1/ AVS-R3



4/8-output Local Unit

Model No.: AVS-104L/108L

Features:

- High-quality 4/ 8 PORT multimedia broadcasting in real time
- Transmitting A/V signals over 300m/1000ft via CAT5 cable from the computer/player
- Dual Remote Unit allowing you connect 2 monitors at the same location easily and save the cost
- UTP/STP CAT5 cabling to reduce cable clutter significantly
- Plug and play without any software installation
- Cascadable

Specifications:

System	Local Unit		Dual Remote Unit	
Model No.	AVS – 104L	AVS – 108L	AVS – R1	AVS – R3
Resolution	Up to 1600 x 1200 @75Hz			
Max. Distance (Remote)	RJ45 output x 4	RJ45 output x 8	110m with Gain/EQ adjust	300m with Gain/EQ/RGB skew adjust
Signal Inputs & Connectors	VGA IN : HDD15F x 1 AUDIO IN : 3.5mmF x 1		UTP/STP IN : RJ45 x 1	
Signal Outputs & Connectors	Monitor : HDD15F x 1 SPEAKER : 3.5mmF x 1 UTP/STP OUT : RJ45 x 1		VGA OUT x 1 ; HDD15F x 2 AUDIO OUT x 1 ; 3.5mmF x 2	
Power	DC12V Power Adapter		DC5V Power Adapter	
Dimensions	16 x 11.5 x 5(H) cm		12 x 8.2 x 2.5(H) cm	