


型号	模号

變更內容	變更日期	版本

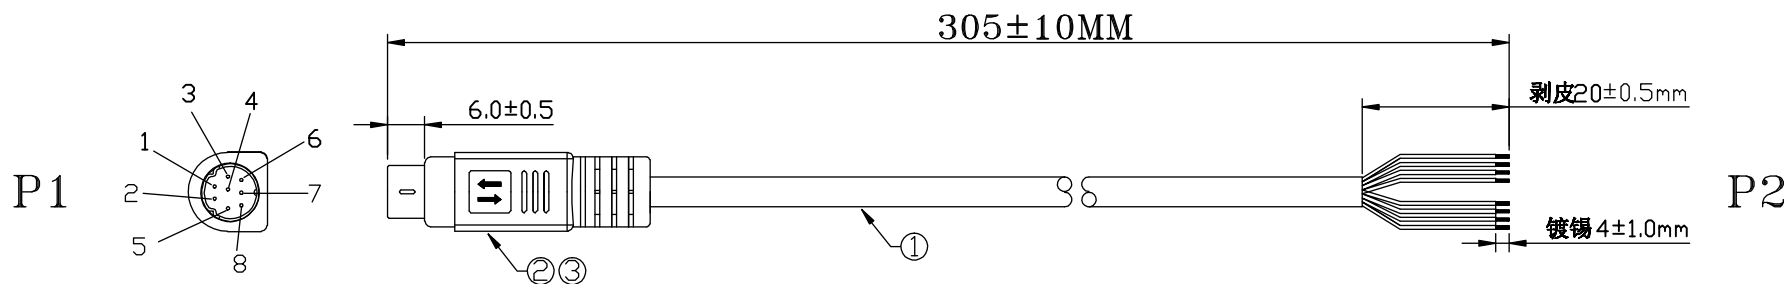

PIN OUT

P1	P2	
1	PURPLE	OPEN
2	BROWN	OPEN
3	BLUE	OPEN
4	PINK	OPEN
5	ORANGE	OPEN
6	GREEN	OPEN
7	RED	OPEN
8	YELLOW	OPEN

包裝方式：10PCS/扎.再依照外箱
大小装入防水袋.

Note:

- 1.100% OPEN SHORT & MISWIRE TEST.
- 2.CONDUCTIVE RESISTANCE:2Ω/MAX.
- 3.INSULATION RESISTANCE:10MΩ/MIN.
- 4.HI-POT TEST:AT DC 300V.

本产品符合“ROHS”环保标准，所使用材料均为相当品。

ITEM	STANDARD SPECIFICATION		
3	OUTER MOLD:PVC 45P BLACK.		KG/K
2	MINI DIN 8PIN MALE 黑色胶芯 镀镍.车针件，pin针倒角.	1	SET
1	CABLE: UL2464 24AWG*8C OD:6.0mm±0.15MM COLOR:BLACK.	1	PCS

Seconn Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
AS DRAWING				Mini DIN 8 Pin Male to Stripping 19mm + TIN Plated 3mm Cable 305mm Length			
			UNIT mm				
DRAWN	Diana	DATE	2018/10/09	PART NO.	SC-S-1810-0903		
SCALE		SIZE	A4	SHEET	1/1	REV	A